




eSHINE STREET 60 - Technical data

Model	Watt	Volt	Amp	Lumens	IP rating	Warranty	Dimensions HxWxD (mm)	Colour	LED Life expect.
eSS 20	20W	12V	1.66A	2,400	IP65	2 Yrs	585x380x122	6,500	50,000+hrs
eSS 40	40W	24V	1.66A	4,800	IP65	2 Yrs	637x380x122	6,500	50,000+hrs
eSS 60	60W	24V	2.50A	7,200	IP65	2 Yrs	637x380x122	6,500	50,000+hrs
eSS 80	80W	24V	3.33A	8,800	IP65	2 Yrs	637x380x122	6,500	50,000+hrs
eSS 100	100W	110-240		12,500	IP65	2 Yrs	637x380x122	6,500	50,000+hrs

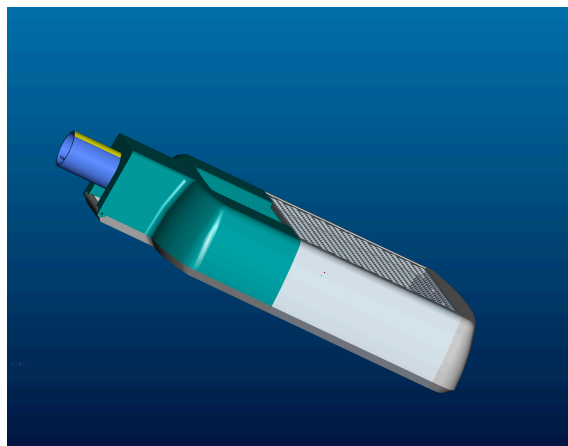

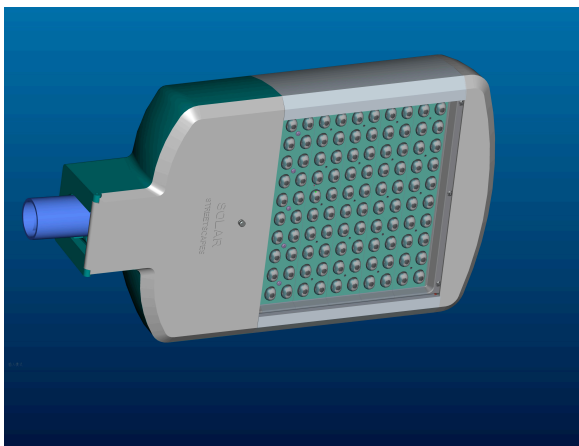

Address: PO Box 812, Cronulla 2230
 Phone: 1300 017 699
 Contact: enquiry@solarconcepts.com.au
 Web: www.solarconcepts.com.au

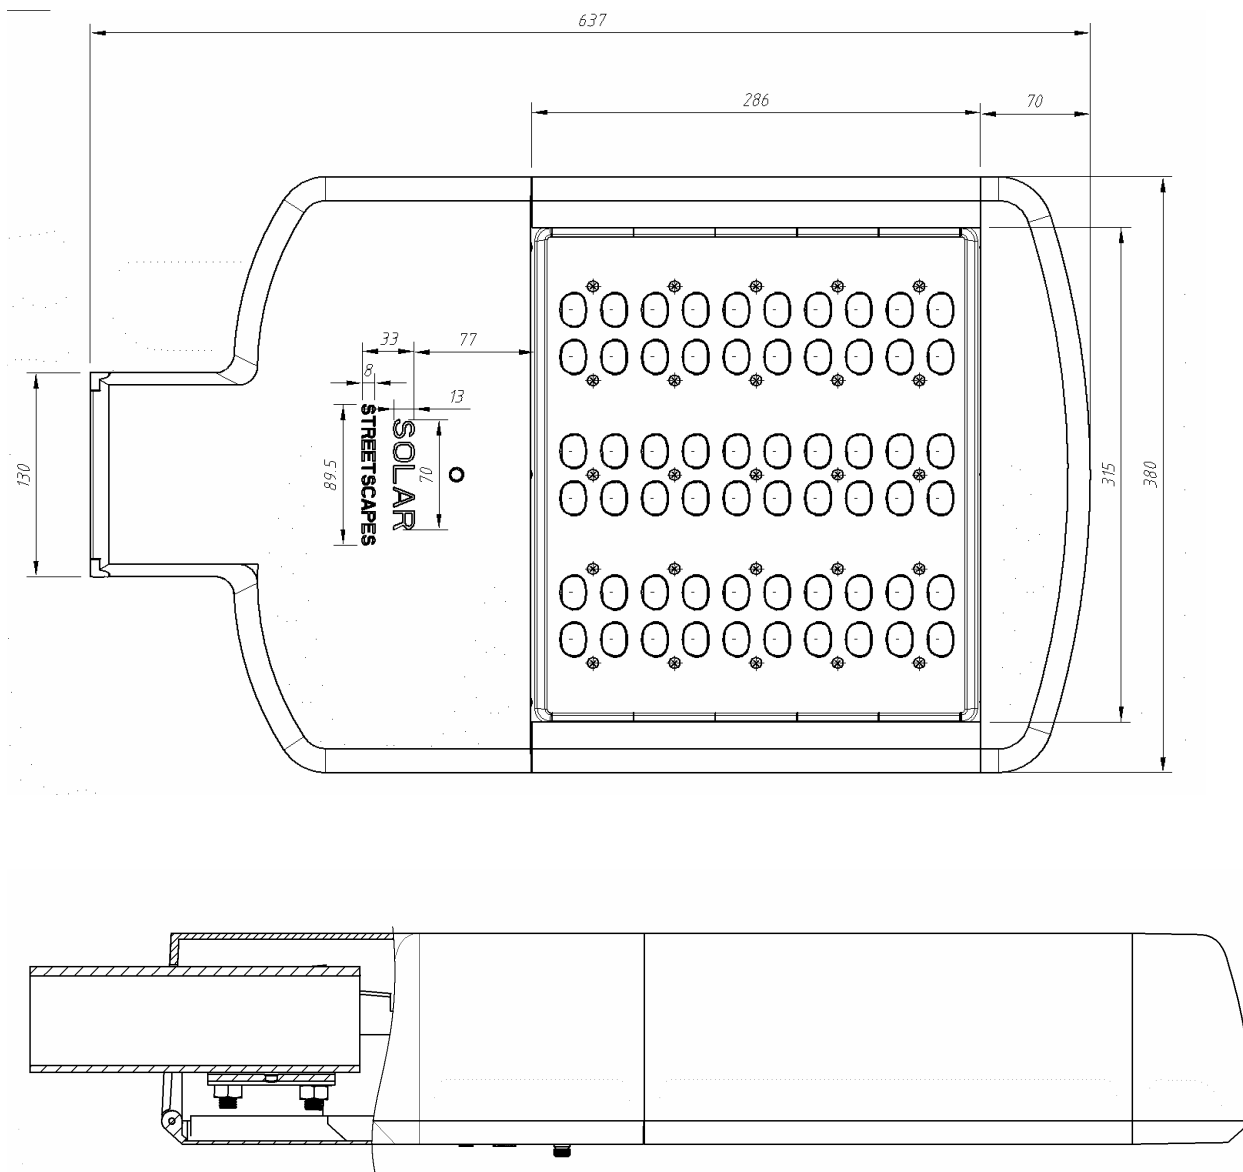


Housing: High Pressure Die Cast
Spigot: 50 /60mmOD
Lamp: 60watt High Powered LED
Warranty: Housing: 10 years
Lamp: 1 year
Driver: 3 years

eSHINE STREET – 60 Photometric Results

Name:	eSHINE STREET 60		
Number:	2010013001	Diameter:	0 mm
Report:	ROADWAY LANTERN TEST	Length:	662 mm
Test no.:	NO.1	Width:	380 mm
Lamp type:	60Pcs Cree XP- E	Height:	122 mm
No. of lamps:	1	Power:	72.326 W
Lamp flux:	7200.00 lm	Operator:	C.H
Date:	30/01/2010 11:25:14	LOR:	84.1 %
Comment:	THE TEST RESULT IS FROM GONIOPHOTOMETER GO-DS1600		

ISOLINE diagram eSHINE STREET 60 / H0 to 355R - V0 to 180U

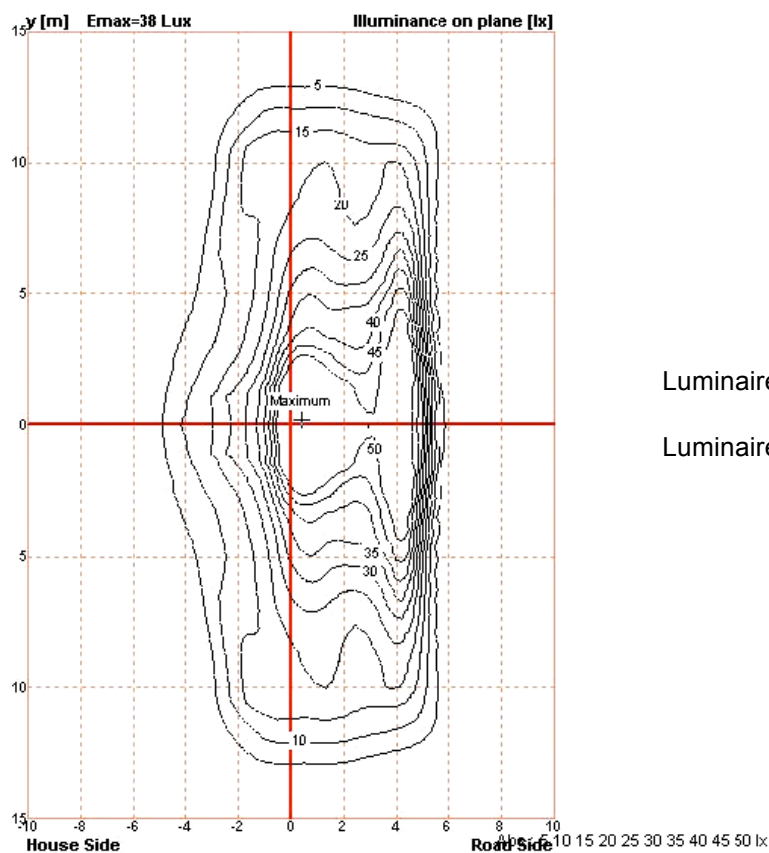

Luminaire mounting height above ground: 5 m

Luminaire rotation angle: 0 °

eSHINE STREET – 60 Photometric Results

Name:	eSHINE STREET 60		
Number:	2010013001	Diameter:	0 mm
Report:	ROADWAY LANTERN TEST	Length:	662 mm
Test no.:	NO.1	Width:	380 mm
Lamp type:	60Pcs Cree XP- E	Height:	122 mm
No. of lamps:	1	Power:	72.326 W
Lamp flux:	7200.00 lm	Operator:	C.H
Date:	30/01.2010 11:25:14	LOR:	84.1 %
Comment:	THE TEST RESULT IS FROM GONIOPHOTOMETER GO-DS1600		

POLAR diagram eSHINE STREET 60 / H0 to 355R - V0 to 180U

